


## 功能 Features


高稳定性，保证严格的真空密封  
 高振动和抗冲击性能  
 频率：32.768 kHz

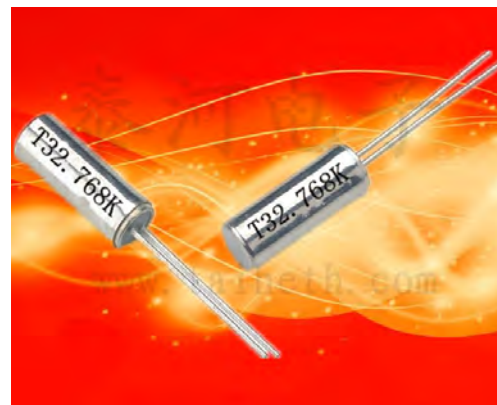

### Electrical Specifications 技术参数

项目	Item / Type	3*8
频率范围	Frequency Range	32.768KHZ
调整频差	Frequency Tolerance (at 25 °C)	± 20PPM or ± 50PPM
温度频差	Frequency Stability Over	-0.04 ppm ± 0.006 ppm
工作温度范围	Operating Temperature Range	-10 — +60 , -20 — +70
静电容	Shunt Capacitance (C0)	5.0pF max
激励功率	Drive Level	1 ~ 10 μW (100 μW typical)
负载电容	Load Capacitance	12.5PF
焊接条件	Soldering Condition	Under 235 ° C with 5sec
储存温度范围	Storage Temperature Range	- 40 ~ + 85 °C

### 外形尺寸 Dimensions

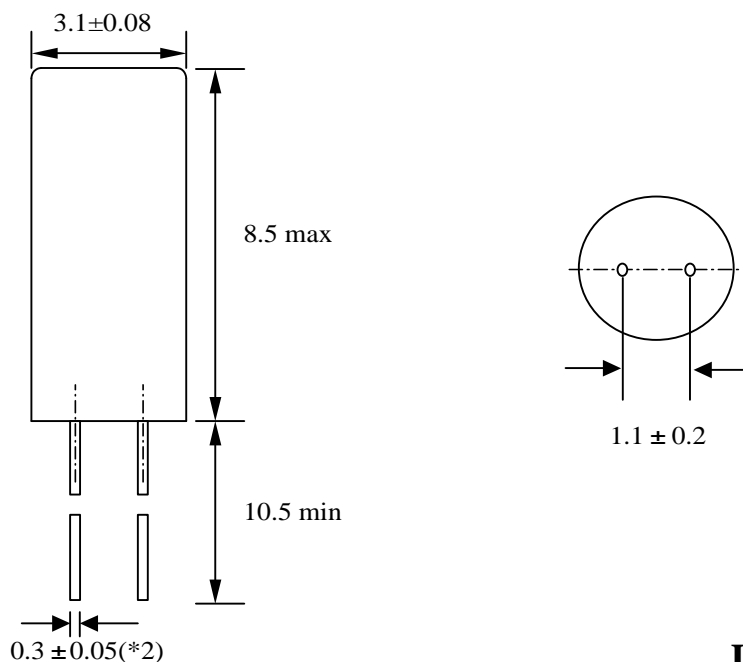

**Dimensions (mm):**